

05-23-00

Case Docket No. PHN 17,448

THE COMMISSIONER OF PATENTS AND TRADEMARKS, Washington, D.C. 20231

Enclosed for filing is the patent application of Inventor(s):
ROBERT J. SLUIJTER, AUGUSTUS J. E. M. JANSSEN

For: TRANSMISSION SYSTEM FOR TRANSMITTING AN AUDIO SIGNAL

ENCLOSED ARE:

- ☒ Appointment of Associates;
☒ Information Disclosure Statement, Form PTO-1449 and copies of documents listed therein;
☒ Preliminary Amendment;
☒ Specification (17 Pages of Specification, Claims, & Abstract);
☒ Declaration and Power of Attorney:
(1 Page of a [] fully executed [X] unsigned Declaration);
☒ Drawing (3 sheets of [] informal [X] formal sheets);
☒ Certified copy of EUROPEAN application Serial No.99201656.8;
☒ Authorization Pursuant to 37 CFR §1.136(a)(3)
[] Other: ;
[] Assignment to .

FEE COMPUTATION

CLAIMS AS FILED				
FOR	NUMBER FILED	NUMBER EXTRA	RATE	BASIC FEE - \$690.00
Total Claims	26 - 20 =	6	X \$18 =	108.00
Independent Claims	8 - 3 =	5	X \$78 =	390.00
Multiple Dependent Claims, if any			\$260 =	0.00
TOTAL FILING FEE			=	\$1188.00

Please charge Deposit Account No. 14-1270 in the amount of the total filing fee indicated above, plus any deficiencies. The Commissioner is also hereby authorized to charge any other fees which may be required, except the issue fee, or credit any overpayment to Account No. 14-1270.

[] Amend the specification by inserting before the first line as a centered heading --Cross Reference to Related Applications--; and insert below that as a new paragraph --This is a continuation-in-part of application Serial No. , filed , which is herein incorporated by reference--.

CERTIFICATE OF EXPRESS MAILINGExpress Mail Mailing Label No. EL335550514USDate of Deposit May 22, 2000

I hereby certify that this paper and/or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Natale A. Manzo
Typed Name

Natale A. Manzo
Signature

Dicran Halajian
Dicran Halajian, Reg. 39,703
Attorney
(914) 333-9607
U.S. Philips Corporation
580 White Plains Road
Tarrytown, New York 10591

F:\WPDOCS\hj\mu12hjb0.ma0.doc

05/22/00
jc832 U.S. PTO

jc815 U.S. PTO
09/575609
05/22/00

Transmission system for transmitting an audio signal.

The present invention relates to a transmission system comprising a transmitter with an encoder for encoding an audio signal, the encoder comprises means for determining a frequency of at least one periodical component, the transmitter further comprises transmitting means for transmitting a signal representing said frequency of at least one periodical component to a receiver, said receiver comprises receiving means for receiving a signal representing said frequency from the transmitter, and a decoder for deriving a reconstructed audio signal on basis of said frequency of the at least one periodical component.

The present invention also relates to a transmitter, a receiver, an encoder, a decoder, a recording system, a reproduction system, an encoding method and a decoding method, a tangible medium comprising a computer program for performing said method, a signal and a recording medium on carrying such a signal.

A transmission system according to the preamble is known from US patent No. 4,937,873.

Such transmission systems and audio encoders are used in applications in which audio signals have to be transmitted over a transmission medium with a limited transmission capacity or have to be stored on storage media with a limited storage capacity. Examples of such applications are the transmission of audio signals over the Internet, the transmission of audio signals from a mobile phone to a base station and vice versa and storage of audio signals on a CD-ROM, in a solid state memory or on a hard disk drive.

Different operating principles of audio encoders have been tried to achieve a good audio quality at a modest bit rate. In one of these operating methods, an audio signal to be transmitted is divided into a plurality of segments having a length of 10-20 ms. In each of said segments the audio signal is represented by a plurality of sinusoids being defined by their amplitude and their frequency. In the encoder the amplitudes and frequencies of the sinusoids are determined.

The transmitting means transmit a representation of the amplitudes and frequencies to the receiver. The operations performed by the transmitter can include, channel coding, interleaving and modulation.

The receiving means receive a signal representing the audio signal from a transmission channel and performs operations like demodulation, de-interleaving and channel decoding. The decoder obtains the representation of the audio signal from the receiver and derives a reconstructed audio signal from it by generating a plurality of sinusoids as described by the encoded signal and combining them into a reconstructed audio signal.

Although the prior art system provides a good coding quality, there still exist an audible difference between the reconstructed audio signal and the original audio signal.

An objective of the present invention is to provide a transmission system according to the preamble in which the quality of the reconstructed audio signal has been further improved.

To achieve said purpose the transmission system according to the invention is characterized in that the encoder further comprises frequency change determining means for determining a frequency change of said at least one periodical component over a predetermined amount of time.

By determining also a frequency change of said at least one periodical component, the quality of the reconstructed audio signal can be improved in two ways. The first way is to transmit the frequency change to the receiver, which can use said frequency change for deriving a reconstructed audio signal. The second way is to use the frequency change to obtain a more accurate value of a frequency of the audio signal. This can e.g. be the pitch in a speech signal, or an arbitrary periodic component in an audio signal. By using the frequency change over a predetermined amount of time, an average frequency value which corresponds to said fundamental frequency, can be determined more accurately.

An embodiment of the invention is characterized in that the transmitting means are arranged for transmitting a further signal representing said frequency change to the receiver, in that the receiver is arranged for receiving said further signal, and in that the decoder is arranged for deriving said reconstructed audio signal also on basis of said change of said frequency.

By representing the frequency change by an additional signal that is transmitted to the receiver, it becomes possible that sinusoids that change (slightly) in frequency within

one synthesis interval are used in generating the reconstructed audio signal. This corresponds more to the properties of the actual audio signal, resulting in an improved quality of the reconstructed audio signal.

A further embodiment of the invention is characterized in that the encoder
5 comprises time transforming means for obtaining a time transformed input signal, wherein the time transforming means are arranged for time compressing the input signal during a first part of the predetermined amount of time and for time expanding the input signal during a second part of the predetermined amount of time in such a way that the time transformed input signal has a smaller frequency change than the input signal.

10 The use of time transformation, also called time warping, to obtain a time transformed audio signal, has been proven to be an effective way for dealing with frequency changes of the signal to be encoded. By using an appropriate time transformation it becomes possible to transform a signal that changes in frequency into a time transformed signal which has a substantially constant frequency.

15 An example of this is an audio signal with a linear frequency sweep starting at a low frequency at the beginning of a segment and ending at a higher frequency at the end of the segment. By time compressing the input signal in the first part of the segment, the frequency of the time-transformed signal will be higher than the frequency of the original input signal. By time expanding the input signal in the second part of the segment, the frequency of the
20 time-transformed signal input signal will be lower than the frequency of the original input signal.

Consequently, a time transformed input signal is obtained of which the frequency in the beginning of the segment has been increased and of which the frequency at the end of the segment has been decreased. If a suitable choice of the time transform is made,
25 it becomes possible to obtain a transformed input signal having a decreased frequency change.

A still further embodiment of the invention is characterized in that the time transform determining means are arranged for deriving a plurality of time transformed input signals, each corresponding to a different time transform, and in that the encoder comprises determining means for selecting the time transform corresponding to the time transformed
30 input signal having the smallest frequency change over said predetermined amount of time.

A way of determining the most suitable time transform is to try a number of different time transforms and select the one resulting in a transformed audio signal having the smallest frequency change.

A still further embodiment of the invention is characterized in that the time transform determining means are arranged for selecting the time transformed input signal having the smallest frequency change over said predetermined amount of time by selecting the time transformed input signal having the highest peak in its autocorrelation function.

5 A useful way of determining the transformed time signal with the smallest frequency change is to calculate the auto-correlation function of the different time transformed input signals. The time-transformed audio signal having the highest peak in its auto-correlation function has the smallest frequency change. Alternatively, it is also possible to calculate the FFT of the time transformed input signal. Then the time transformed audio signal resulting in
10 the highest peak in the FFT domain has the most constant frequency.

A still further embodiment of the transmission system according to the invention is characterized in that the time transform is defined by a quadratic relation between the actual time and the transformed time.

A quadratic relation between the actual time and the transformed time can be easily calculated, and is able to achieve time compression in a first part of the time segment and time expansion in a second part of the time segment.

A still further embodiment of the transmission system according to the invention is characterized in that the relation between the actual time t and the transformed time τ is defined by $\tau(t) = \frac{a}{T} \cdot t^2 + (1-a) \cdot t$; $0 \leq t \leq T$ in which a is a parameter defining
15 the time transform and T is the duration of a signal segment.

The above quadratic time transform has only one parameter and is still able to obtain time compression and time expanding during one signal segment. The advantage of having only one parameter is the reduced number of bits that is required to transmit the optimum time transform to the transmitter. Further it can be shown that this time transform
20 function is able to completely eliminate a linear frequency change of the input signal.

The invention will now be explained with reference to the drawings.

Fig. 1 shows a transmission system according to the invention for transmitting a
30 audio signal.

Fig. 2 shows a graph of a time transform function for several values of the parameter a .

Fig. 3 shows an embodiment of the transform determining means 8 used in the transmission system according to Fig. 1.

Fig. 4 shows graphs of discrete time signals involved with the time transform by the time warper 6 according to Fig. 1.

Fig. 5 shows graphs of discrete time signals involved with the inverse time transform by the time de-warper 26 according to Fig. 1.

In the transmission system according to Fig. 1, an audio signal to be transmitted is applied to an input of an audio encoder 4 included in a transmitter 2. In the audio encoder 4 the input audio signal is applied to an input of frequency change determining means 8 and to an input of the time transform means which is here a time warper 6.

A first output signal of the frequency change determining means 8, carrying an output signal a, is connected to a control input of the time warper 6. The output signal a represents a frequency change of a periodical component of the input signal. The time warper 6 performs a time transformation defined by the parameter a on its input signal. The parameter a is selected such that the frequency of a periodical component in the output signal of the time warper 6 is minimized.

At a second output of the frequency change determining means 8 a signal PITCH, representing an average frequency of the periodical component in the audio signal, is presented. In speech coding the signal PITCH represents the pitch of the speech signal.

The output of the time warper 6 is connected to an input of an analyzer 10 which is arranged for determining parameters representing the output signal of the time warper 6. A first possibility is that the analyzer 10 is a linear predictive analyzer, which determines a plurality of LPC coefficients of the input signal. Alternatively it is also possible that the analyzer 10 determines directly the amplitudes and frequencies of a plurality of sinusoidal components present in the output signal of the time warper 6.

The signal a, the signal PITCH and the output signal of the analyzer 10 representing additional properties of the audio signal (LPC coefficients or amplitude and frequency of sinusoids) are applied to corresponding inputs of a multiplexer 12. An output of the multiplexer 12 is connected to an input of the transmitting means 14 which transmit the output signal of the multiplexer 14 to a receiver 16.

The transmit means 14 perform operations like channel encoding, interleaving and modulating the signal to be transmitter on an RF carrier. In case the present invention is

used for recording the encoded audio signal on a recording medium such as a hard drive or an optical disk (CD, DVD) the modulation step can be dispensed with. In such cases often a modulation code is used to shape the spectrum of the signal to be written on the recording medium.

In the receiver 16, the signal received from the transmitter 2 is first processed by the receiving means 18. The receiving means 18 are arranged for performing demodulation, de-interleaving and channel decoding. The output signal of the receiving means 18 is connected to an input of a decoder 20. In the decoder 20, the output signal of the receiving means 18 is connected to an input of a demultiplexer 22.

The demultiplexer provided output signals a, PITCH and LPC at its outputs. The signals PITCH and LPC are used in the synthesizer 24 that derives a reconstructed audio signal from these parameters. The operation of a such a synthesizer which derives a reconstructed audio signal on basis of a pitch signal and a plurality of LPC parameters is described in detail in the International Patent Application WO99/03095-A1.

The output of the synthesizer 24 is connected to an input of the inverse time transform means which are here a de-warper 26. The de-warper 26 re-introduces the frequency variations that were removed from the input signal by the time warper 6. At the output of the dewarper 26 the reconstructed audio signal is available.

A suitable time transform function to be used in the time warper 6 is given by:

$$\tau(t) = \frac{a}{T} \cdot t^2 + (1-a) \cdot t \quad ; 0 \leq t \leq T \quad (1)$$

In (1) a is a warping parameter, T is the duration of the speech segment, t represents the real time and τ is the transformed time. The value of the warping parameter a has a range that ensures that the warping function always increases with time t. This leads to:

$$|a| \leq 1 \quad (2)$$

The warping function is chosen such that the total duration of the warped audio segment is equal to the duration of the original audio segment. The start and end values of the warped segment are equal to the start and end values of the original audio segment.

Whether time compression or time expansion takes place can be determined by differentiating (1) with respect to t. This results into:

$$\frac{d\tau}{dt} = 2a \frac{t}{T} + (1-a) \quad (3)$$

Time compression takes place when $d\tau/dt$ is smaller than 1 and time expansion takes place when $d\tau/dt$ is larger than 1. From (3) follows that time compression takes place for

$t < T/2$ and time expansion takes place for $t > T/2$ when $a > 0$. Time compression takes place for $t > T/2$ and time expansion takes place for $t < T/2$ when $a < 0$.

5 The inverse of the time warping function according to (1) is defined according to:

$$t(\tau) = \begin{cases} \tau, & a = 0 \\ \frac{(a-1)}{2a}T + \frac{T}{2a} \sqrt{(1-a)^2 + 4\frac{a \cdot \tau}{T}}, & 0 < |a| \leq 1 \end{cases} \quad (4)$$

Fig. 2 shows τ/T as function of t/T for different values of a . If a is equal to 0, τ is equal to t and no time warping takes place.

In the following the operation of the time warper defined by (1) will be analyzed. If the signal $s(t)$ is a signal with a time varying periodicity, like voiced speech, this can be written as:

$$s(t) = \sum_k \{x_k \cos k\Phi(t) + y_k \sin k\Phi(t)\} \quad (5)$$

In (5) k is the harmonic number, x_k and y_k are amplitude factors, and $\Phi(t)$ is a phase angle. For the time transformed signal $s'(\tau)$ can be written:

$$s'(\tau) = \sum_k \{x_k \cos k\Psi(\tau) + y_k \sin k\Psi(\tau)\} \quad (6)$$

As (5) and (6) represent the same physical signals, $\Phi(t)$ is equal to $\Psi(\tau)$. The instantaneous angular frequency $\omega_k(t)$ of the k^{th} harmonic of $s(t)$ is given by:

$$\omega_k(t) = k \frac{d\Phi(t)}{dt} \quad (7)$$

15 For the instantaneous angular frequency $\Omega_k(\tau)$ of the k^{th} harmonic of $s'(\tau)$ can be found:

$$\Omega_k(\tau) = k \frac{d\Psi(\tau)}{d\tau} \quad (8)$$

Because $\Phi(t) = \Psi(\tau)$, their derivatives with respect to time t are also equal. Using the chain rule, this can be written as:

$$\frac{d\Phi(t)}{dt} = \frac{d\Psi(\tau)}{d\tau} = \frac{d\Psi(\tau)}{d\tau} \frac{d\tau}{dt} \quad (9)$$

For the relation between $\Omega_k(\tau)$ and $\omega_k(t)$ can be found by using (9):

$$\Omega_k(\tau) = \frac{\omega_k}{\frac{d\tau}{dt}} \quad (10)$$

Another important property of the time warper is that the average frequency of the k^{th} harmonic of the warped signals is equal to the average frequency of the k^{th} harmonic of the original signal. This follows easily from:

$$\overline{\Omega}_k = \frac{1}{T} \int_0^T \Omega_k(\tau) d\tau = \frac{1}{T} \int_0^T \frac{\omega_k(t)}{\frac{d\tau}{dt}} d\tau = \int_0^T \omega_k(t) dt = \overline{\omega}_k \quad (11)$$

Below will be shown that the above time warping function is able to remove

5 linear frequency variations from the input signal.

Substituting (3) into (10) results into:

$$\Omega_k(\tau) = \frac{\omega_k(t)}{1 - a + \frac{2a}{T}t} \quad (12)$$

Assume an input signal having sinusoidal input signal having an angular frequency $\omega(t)$ that changes linearly over time. For the angular frequency of this signal can be written:

$$\omega(t) = \alpha + \beta \frac{t}{T} \quad (13)$$

Substituting (13) into (12) gives:

$$\Omega(\tau) = \frac{\alpha + \beta \frac{t}{T}}{1 - a + \frac{2a}{T}t} \quad (14)$$

If $\Omega(\tau)$ should be constant, the following should be valid:

$$\frac{\alpha}{1 - \hat{a}} = \frac{\beta}{2\hat{a}} \Rightarrow \hat{a} = \frac{\beta}{\beta + 2\alpha} \quad (15)$$

Substituting (15) into (14) results into:

$$\hat{\Omega} = \Omega(\tau)|_{a=\hat{a}} = \alpha + \frac{\beta}{2} \quad (16)$$

This corresponds to a constant value that is equal to the average of the angular frequency $\omega(t)$ over the segment with duration T .

15 In the frequency change determining means 8 according to Fig. 3, the audio signal is first applied to a weighting filter 30. This weighting filter 30 is an adaptive LPC inverse filter. The output signal of the weighting filter 30 is an LPC residual. Using the

prediction residual instead of the input signal has as advantage that it minimizes the formant interaction with the determination of the frequency of the fundamental frequency (pitch).

The output of the weighting filter 30 is connected to an input of a low pass filter 32. This low pass filter has a cut-off frequency of about 1100 Hz. The output of the low pass filter 32 is connected to inputs of a plurality of time warpers 34, 42 and 50. The time warpers 34, 42 and 50 are arranged for performing a time transformation according to (1), but each with a different value of the parameter a .

The output of the time warpers 34, 42 and 50 are connected to inputs of correlators 37, 41 and 51, which each determine a measure which is an approximation of the autocorrelation function of the output signal of the corresponding time warper.

The correlators 37, 41 and 51 use the property that the autocorrelation function can be determined by calculating the inverse FFT from the power spectrum of the signal under analysis. As an approximation of the power spectrum also the absolute value of the Fast Fourier Transform can be used. The analysis window is given a relatively long duration of 64 msec in order to deal with very long pitch periods (up to 25 msec) which can occur in some male voices. The choice of this long analysis window becomes possible due to the time warping operation, which delivers a more stationary time transformed signal.

The input signal of the correlators 37, 41 and 51 is subjected to a Fourier transform in the Fourier transformers 36, 44 and 52. These Fourier transformers determine the absolute value of the FFT of their input signals. Subsequently, a so-called "zero phase function" $z_i(n)$ of the output signals of the Fast Fourier transformers 36, 44 and 52 is determined by calculating the inverse FFT of the amplitude spectrum by means of Inverse Fast Fourier Transformers 38, 46 and 54.

The zero phase functions $z_i(n)$ are normalized with respect to their value $z_i(0)$ in the normalizers 40, 48 and 56. The outputs of the normalizers 40, 48 and 56 are connected to the inputs of the selection means 58 which selects the time warping parameter a that corresponds to the zero phase function having the highest peak for a non-zero value of n as the optimum value. This is based on the recognition that an optimally warped signal shows the most constant frequency $\Omega_k(\tau)$. Consequently, this signal has the largest peak in its autocorrelation function.

The time warpers and dewarpers are up to now described as continuous time operations. In a real implementation, these operations should be implemented in a discrete time system. If a segment of the input signal with duration T is represented by N samples, the

warped segment has also duration T and should also be represented by N samples. However, the sampling instants of the time warped signal do not correspond to sampling instants of the original input signal. This is shown for a time warper in Fig. 5 and for a time de-warper in Fig. 6.

- 5 In Fig. 5 graph 60 corresponds to the input signal and graph 62 corresponds to the warped output signal. As is shown by the arrow 64 in Fig. 4, the sampling instant $j=2$ in graph 62 corresponds to a time between the sample instants $i=2$ and $i=3$ in graph 60. This corresponds to a time compression. As is shown by the arrow 66 in Fig. 4, the sampling instant $j=N-1$ in graph 62 corresponds to a time between the sample instants $N-2$ and $N-1$ in graph 60.
- 10 This corresponds to a time expansion.

To deal with this problem, sample values have to be calculated for each of the occurring values of τ_j , which are given by:

$$\tau_j = j \cdot \frac{T}{N} \quad ; 1 \leq j \leq N \quad (17)$$

This is done by calculating from τ_j a corresponding value of t by using (4). From this value of t the nearest values on the sampling grid are determined. This results into two values of i according to:

$$\begin{aligned} i_1 &= \left\lfloor N \cdot \frac{t}{T} \right\rfloor \\ i_2 &= \left\lceil N \cdot \frac{t}{T} \right\rceil \end{aligned} \quad (18)$$

In (18) $\lfloor \cdot \rfloor$ represent the nearest integer smaller than its argument, and $\lceil \cdot \rceil$ represents the nearest integer larger than its argument. Finally, a linearly interpolated sample value for τ_j is calculated according to:

$$s(\tau_j) = s(i_1) \cdot \left(N \cdot \frac{t}{T} - i_1 \right) + s(i_2) \cdot \left(1 - N \cdot \frac{t}{T} + i_1 \right) \quad (19)$$

- 20 It is observed that, besides linear interpolation, also other types of interpolation such as quadratic and cubic interpolation can be used.

Graph 68 in Fig. 5 shows the warped time-scale and graph 74 shows the corresponding unwarped time scale.

The inverse warping can be done in a similar way as is shown in Fig 5. First, the values of t_i for which the corresponding samples have to be determined are found by

$$t_i = i \cdot \frac{T}{N} ; 1 \leq i \leq N \quad (20)$$

Now the calculation continues with determining the value of τ corresponding to a given t_i as is indicated by the arrows 72 and 74 by using the expression (1). From this value of t the nearest values on the sampling grid are determined. This results into two values of j according to:

$$\begin{aligned} j_1 &= \left\lfloor N \cdot \frac{\tau}{T} \right\rfloor \\ j_2 &= \left\lceil N \cdot \frac{\tau}{T} \right\rceil \end{aligned} \quad (21)$$

Finally, a linearly interpolated sample value for t_i is calculated according to:

$$s(t_i) = s(j_1) \cdot \left(N \cdot \frac{\tau}{T} - j_1 \right) + s(j_2) \cdot \left(1 - N \cdot \frac{\tau}{T} + j_1 \right) \quad (22)$$

It is observed that the present invention can be implemented by using dedicated hardware or by using a program which runs on a programmable processor. Also it is conceivable that a combination of these implementations is used.

CLAIMS:

1. Transmission system comprising a transmitter with an encoder for encoding an audio signal, the encoder comprises frequency determining means for determining a frequency of at least one periodical component of the audio signal, the transmitter further comprises transmitting means for transmitting a signal representing said frequency to a receiver, said receiver comprises receiving means for receiving a signal representing said frequency from the transmitter, and a decoder for deriving a reconstructed audio signal on the basis of said frequency, characterized in that the encoder further comprises frequency change determining means for determining a frequency change of said at least one periodical component of the audio signal over a predetermined amount of time.

2. Transmission system according to claim 1, characterized in that the transmitting means are arranged for transmitting a further signal representing said frequency change to the receiver, in that the receiver is arranged for receiving said further signal, and in that the decoder is arranged for deriving said reconstructed audio signal also on basis of said frequency change.

3. Transmission system according to claim 1 or 2, characterized in that the encoder comprises means for determining a fundamental frequency from the audio signal using said frequency change.

4. Transmission system according to one of the claims 1, 2, or 3, characterized in that the encoder comprises time transforming means for obtaining a time transformed audio signal, wherein the time transforming means are arranged for time compressing the audio signal during a first part of the predetermined amount of time and for time expanding the audio signal during a second part of the predetermined amount of time in such a way that the time transformed audio signal has a smaller frequency change than the audio signal.

5. Transmission system according to claim 1, 2, 3 or 4, characterized in that the frequency change determining means comprise time transform determining means for deriving

a plurality of time transformed audio signals, each corresponding to a different time transform, and in that the time transform determining means comprise selection means for selecting the time transform corresponding to the time transformed audio signal having a smallest frequency change over said predetermined amount of time.

5

6. Transmission system according to claim 5, characterized in that the time transform determining means are arranged for selecting the time transformed audio signal having the smallest frequency change over said predetermined amount of time by selecting the time transformed audio signal having the highest peak in its autocorrelation function.

10

7. Transmission system according to one of the claims 4 to 6, characterized in that the time transform is defined by a quadratic relation between the actual time and the transformed time.

15

8. Transmission system according to claim 7, characterized in that the relation between the actual time t and the transformed time τ is defined by

$$\tau(t) = \frac{a}{T} \cdot t^2 + (1-a) \cdot t \quad ; \quad 0 \leq t \leq T \text{ in which } a \text{ is a parameter defining the time transform and}$$

T is the duration of a signal segment.

20

9. Transmitter with an encoder for encoding an audio signal, the encoder comprises frequency determining means for determining a frequency of at least one periodical component of the audio signal, the transmitter further comprises transmitting means for transmitting a signal representing said frequency, characterized in that the encoder further comprises frequency change determining means for determining a frequency change of said at least one periodical component of the audio signal over a predetermined amount of time.

25

10. Transmitter according to claim 9, characterized in that the transmitting means are arranged for transmitting a further signal representing said frequency change.

30

11. Transmitter according to claim 9 or 10, characterized in that the encoder comprises means for determining a fundamental frequency from the audio signal under use of said change of said fundamental frequency over a predetermined amount of time.

12. Transmitter according to one of the claims 9, 10, or 11, characterized in that the encoder comprises time transforming means for obtaining a time transformed audio signal, wherein the time transforming means are arranged for time compressing the audio signal during a first part of the predetermined amount of time and for time expanding the audio signal during a second part of the predetermined amount of time in such a way that the time transformed audio signal has a smaller frequency change than the audio signal.

13. Receiver comprising receiving means for receiving an encoded audio signal representing an audio signal by at least a frequency of at least one periodical component of the audio signal, and a decoder for deriving a reconstructed audio signal on the basis of said frequency, characterized in that the receiver is arranged for receiving a further signal representing a frequency change of said at least one periodical component of said audio signal over a predetermined amount of time, and in that the decoder is arranged for deriving said reconstructed audio signal also on the basis of said frequency change.

14. Receiver according to claim 13, characterized in that the decoder comprises time transforming means for obtaining the reconstructed audio signal by time transforming a decoded signal wherein the time transforming means are arranged for time expanding the decoded signal during a first part of the predetermined amount of time and for time compressing the decoded signal during a second part of the predetermined amount of time in such a way that the time transformed decoded signal has a larger frequency change than the decoded signal.

15. Encoder for encoding an audio signal, the encoder comprises means for determining a frequency of at least one periodical component of the audio signal, and for deriving a signal representing said frequency, characterized in that the encoder further comprises frequency change determining means for determining a signal representing a frequency change of said at least one periodical component over a predetermined amount of time.

16. Encoder according to claim 15, characterized in that the encoder comprises time transforming means for obtaining a time transformed audio signal, wherein the time transforming means are arranged for time compressing the audio signal during a first part of the predetermined amount of time and for time expanding the audio signal during a second

part of the predetermined amount of time in such a way that the time transformed audio signal has a smaller frequency change than the audio signal.

17. Decoder for deriving a reconstructed audio signal from an encoded audio signal representing said audio signal by at least a frequency of at least one periodical component of the audio signal, and a decoder for deriving a reconstructed audio signal on the basis of said frequency, characterized in that the decoder is arranged for deriving said reconstructed audio signal also on the basis of a further signal representing a frequency change of said at least one periodical component over a predetermined amount of time.

18. Decoder according to claim 17, characterized in that the decoder comprises time transforming means for obtaining the reconstructed audio signal by time transforming a decoded signal wherein the time transforming means are arranged for time expanding the decoded signal during a first part of the predetermined amount of time and for time compressing the decoded signal during a second part of the predetermined amount of time in such a way that the reconstructed audio signal has a larger frequency change than the decoded signal.

19. Method for encoding an audio signal comprising determining a frequency of at least one periodical component, and deriving a signal representing said frequency of at least one periodical component of the audio signal, characterized in that the method further comprises determining a signal representing a frequency change of said at least one periodical component of the audio signal over a predetermined amount of time.

20. Method according to claim 19, characterized in that the method comprises deriving a time transformed audio signal, the method further comprising time compressing the audio signal during a first part of the predetermined amount of time and for time expanding the audio signal during a second part of the predetermined amount of time in such a way that the time transformed audio signal has a smaller frequency change than the audio signal.

21. Method for deriving a reconstructed audio signal from an encoded audio signal representing said audio signal by at least a frequency of at least one periodical component of the audio signal, and a decoder for deriving a reconstructed audio signal on basis of said frequency, characterized in that the method comprises deriving said reconstructed audio signal

also on basis of a further signal representing a frequency change of said at least one periodical component of the audio signal over a predetermined amount of time.

22. Method according to claim 21, characterized in that the method comprises
5 deriving the reconstructed audio signal by a time transforming of a decoded signal wherein the time transforming comprises time expanding the decoded signal during a first part of the predetermined amount of time and for time compressing the decoded signal during a second part of the predetermined amount of time in such a way that the time transformed decoded signal has a larger frequency change than the decoded signal.

23. Storage medium carrying a computer program for performing a method
10 according to one of the claims 19 to 22.

24. Signal carrying a computer program for performing a method according to one
15 of the claims 19 to 22.

25. Encoded audio signal representing said audio signal by at least a frequency of at
least one periodical component of the audio signal, characterized in that the encoded audio
signal comprises a further signal component representing a frequency change of said at least
20 one periodical component over a predetermined amount of time.

26. Storage medium carrying an encoded audio signal according to claim 23.

ABSTRACT:

In several types of audio coding a frequency of one or more periodical components is determined and used in the encoding process.

A first example is a coding method in which the audio signal is represented by a plurality of sinusoids from which the frequency and the amplitudes are determined by means of an analyzer (10). These amplitudes and frequencies are then transmitted to the decoder (20) which comprises a synthesizer (24) which reconstructs the audio signal on basis of the amplitudes and frequencies of determined by the analyzer (10).

A second example is a pitch based audio coding method, which is particularly suited for encoding speech signals. In such a pitch based encoding system, the pitch is determined in a pitch detector (8) and transmitted to the receiver (16). Besides the pitch, also the structure of the spectrum of the speech signal is transmitted to the receiver (16). The structure of the spectrum is often transmitted in the form of LPC parameters, such as LAR's (Log Area Ratios) or LSP's (Line Spectral Pairs).

In practical audio signals, the frequency of the periodical component to be determined is not always constant, but may slightly vary over an analysis interval. To correct for said frequency change, the system according to the invention comprises frequency change determining means (8) which determine a change of the frequency of the periodical component over the analysis period. This change of frequency can be transmitted to the decoder for increasing the accuracy of the reconstruction of the audio signal. Also it is possible that the frequency change is only used to obtain a more accurate value of the pitch.

Preferably the frequency change is determined by using a time warper (6) which performs a time transformation such that a time transformed audio signal is obtained with a minimum frequency change.

Fig. 1

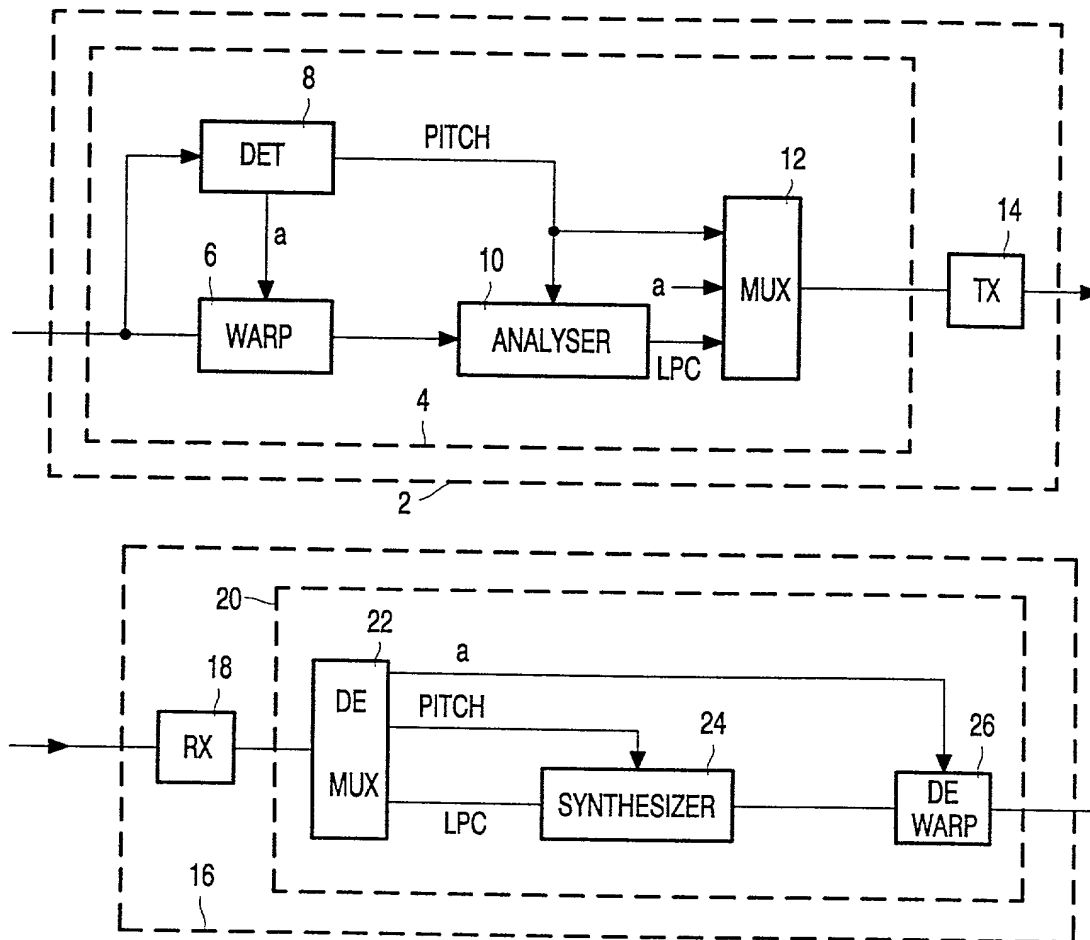


FIG. 1

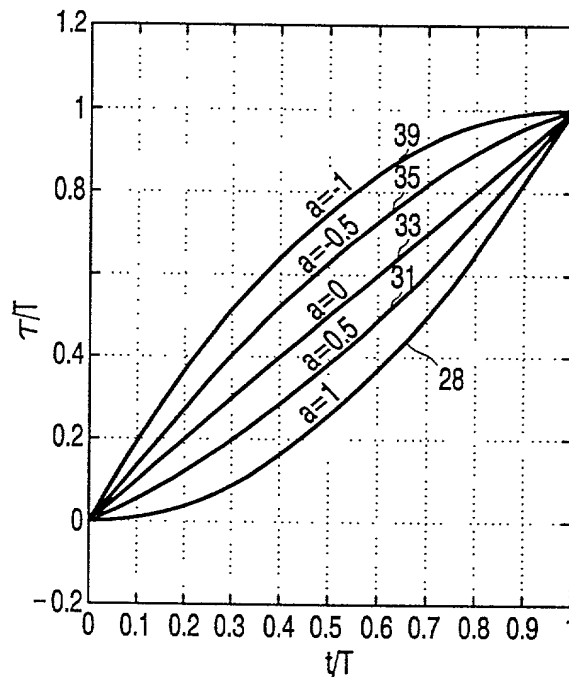


FIG. 2

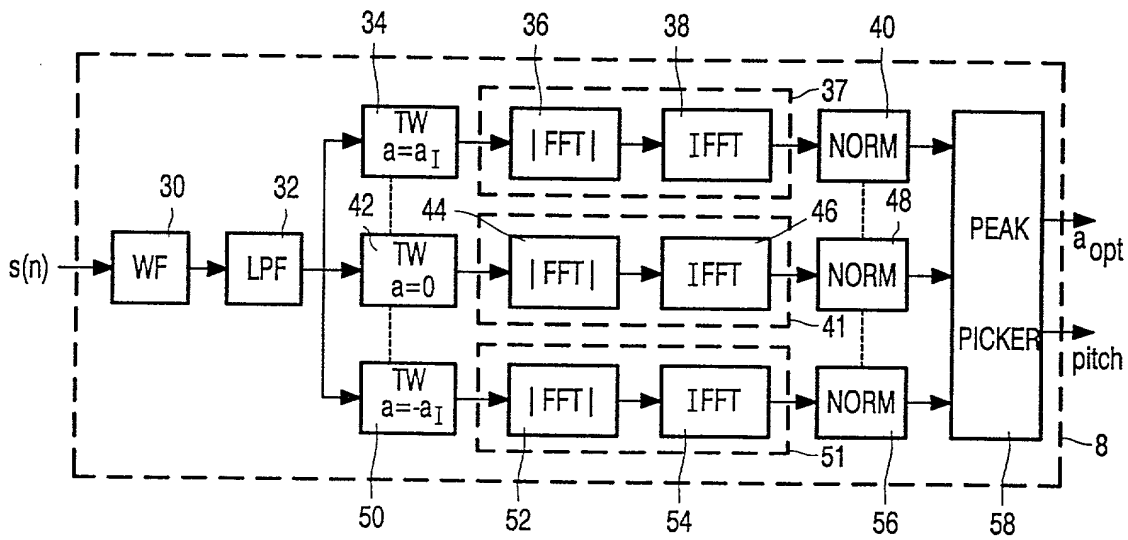


FIG. 3

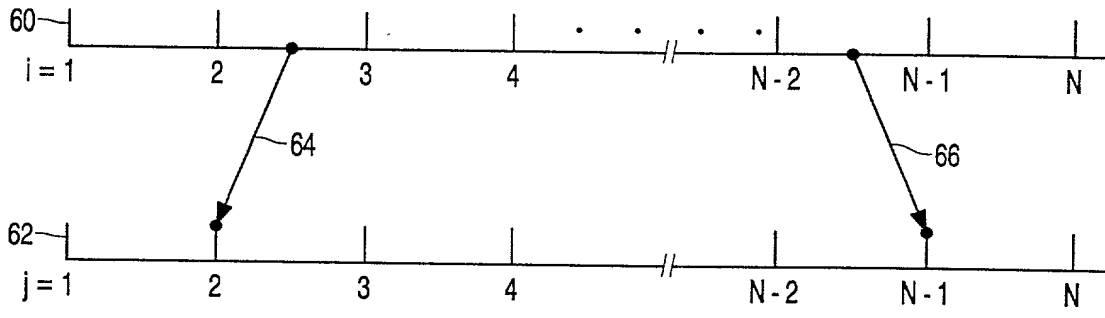


FIG. 4

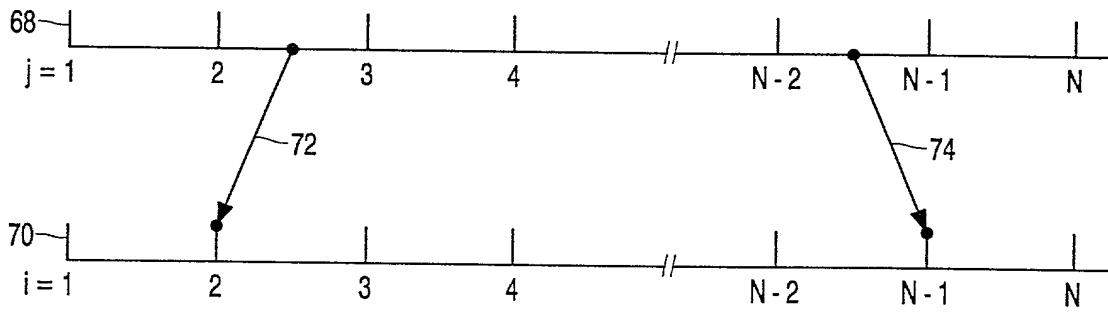


FIG. 5

DECLARATION and POWER OF ATTORNEY

ATTORNEY'S DOCKET NO.:
PHN 17.448 US

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

"Transmission system for transmitting an audio signal

the specification of which (check one)

☐ is attached hereto.

☐ was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by the amendment(s) referred to above.

I acknowledge the duty to disclose information which is material to patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

COUNTRY	APP. NUMBER	DATE OF FILING (DATE, MONTH, YEAR)	PRIORITY CLAIMED UNDER 35 U.S.C. 119
Europe	99201656.8	26 May 1999	YES

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

PRIOR UNITED STATES APPLICATION(S)

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (PATENTED, PENDING, ABANDONED)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Algy Tamoshunas, Reg. No. 27,677

Jack E. Haken, Reg. No. 26,902

SEND CORRESPONDENCE TO: Corporate Patent Counsel;

U.S. Philips Corporation; 580 white Plains Road;

Tarrytown, NY 10591

DIRECT TELEPHONE CALLS TO:

(name and telephone No.)

(914) 332-0222

Dated:

Inventor's Signature:

Full Name of in Inventor	Last Name SLUIJTER	First Name Robert	Middle Name Johannes
Residence & Citizenship	City Eindhoven	State of Foreign Country The Netherlands	Country of Citizenship The Netherlands
Post Office Address	Street Prof. Holstlaan 6	City 5656 AA Eindhoven	State of Country The Netherlands

Zip Code

Dated:

Inventor's Signature:

Full Name of in Inventor	Last Name JANSSEN	First Name Augustus	Middle Name Josephus Elizabeth Maria
Residence & Citizenship	City Eindhoven	State of Foreign Country The Netherlands	Country of Citizenship The Netherlands
Post Office Address	Street Prof. Holstlaan 6	City 5656 AA Eindhoven	State of Country The Netherlands

Zip Code

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Atty. Docket

ROBERT J. SLUIJTER ET AL.

PHN 17,448

Serial No.

Group Art Unit

Filed: CONCURRENTLY

Examiner:

Title: TRANSMISSION SYSTEM FOR TRANSMITTING AN AUDIO SIGNAL

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

APPOINTMENT OF ASSOCIATES

Sir:

The undersigned Attorney of Record hereby revokes all prior appointments (if any) of Associate Attorney(s) or Agent(s) in the above-captioned case and appoints:


DICRAN HALAJIAN

(Registration No. 39,703)

c/o U.S. PHILIPS CORPORATION, Intellectual Property Department, 580 White Plains Road, Tarrytown, New York 10591, his Associate Attorney(s)/Agent(s) with all the usual powers to prosecute the above-identified application and any division or continuation thereof, to make alterations and amendments therein, and to transact all business in the Patent and Trademark Office connected therewith.

ALL CORRESPONDENCE CONCERNING THIS APPLICATION AND THE LETTERS PATENT WHEN GRANTED SHOULD BE ADDRESSED TO THE UNDERSIGNED ATTORNEY OF RECORD.

Respectfully,

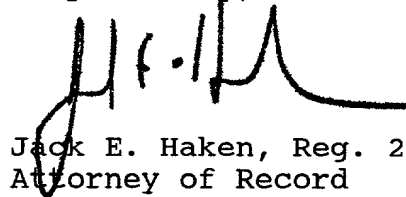

Jack E. Haken, Reg. 26,902
Attorney of Record

Dated at Tarrytown, New York
this 12TH day of May, 2000.

\\SERVER0\SYS2\WPDOCS\HJ\mu12hje0.ma0.doc